

## MiniFil - Art. No.:65 150

- » High vacuum extraction
- » Safe filter change



### Applications

- » Also suitable for high-alloy steel
- » Medium levels of smoke and dust
- » Occasional to frequent use
- » Torch extraction

### Benefits

- » Energy-saving operation due to integrated start/stop function
- » Increased safety with safe filter change
- » Ideal for changing workplaces due to its low weight and optional trolley
- » Optimal adjustment to the welding process with stepless speed control

### Properties

- » Filter monitoring
- » Stepless speed control
- » Safe Change Filter
- » Start/Stop-Automatic for alternating current
- » Spark separator

### Accessories





- » Trolley
- » Various hose lengths
- » Various extraction nozzles

### Technical Data

<b>Art. No</b>	<b>65 150</b>
<b>Filter</b>	
Filter stages	3
Filter method	Disposable filter
Filter surface	ca. 12 m <sup>2</sup>
Type of filter	SafeChangeFilter
Filter material	Non-woven polyester
Filter efficiency	> 99 %
Filterclass	H13
Additional filters	Cyclone pre-filter
Additional filters	Pre-filter (aluminum)
<b>Basic data</b>	
Extraction capacity	150 m <sup>3</sup> /h
Weight	20 kg
Motor power	2 kW
Power supply	1 x 230 V / 50 Hz
Rated current	11 A
Control voltage	24 V, DC
Noise level	74 dB(A)

<b>Additional information</b>	
IFA-Certification	W3-Approved
Fan type	Suction turbine
Hose connection	Ø 45 mm



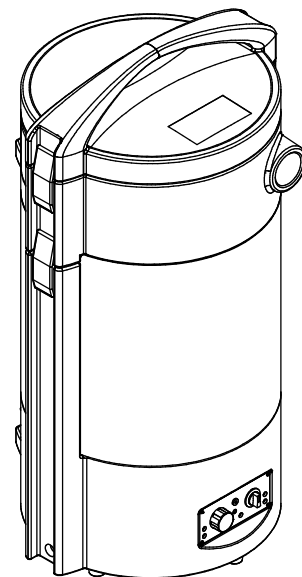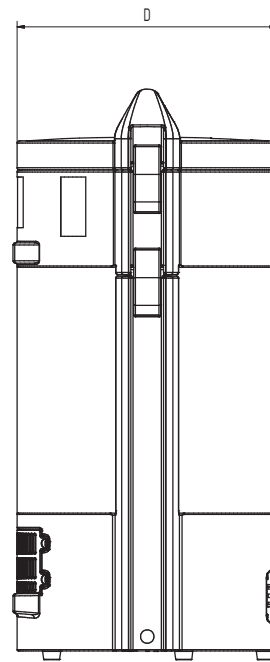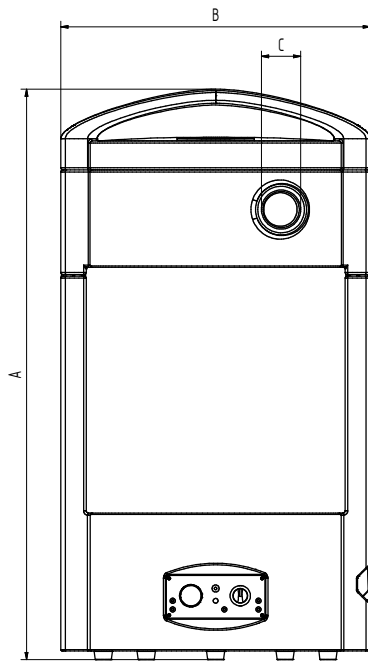

## Technical Data

### Dimensions

A	790 mm
B	425 mm
C	45 mm
D	365 mm